

Sonesse® 40 RTS 447 MHz

Wired

RS485

Dry contact

RTS

io

SOLUTIONS FOR COMMERCIAL BUILDINGS

The new standard for Interior Window Covering market: The most compact quiet AC motor dedicated to interior applications.



Applications



roller
blinds



roman
blinds



pleated
and cellular
blinds



venetian
blinds



projection
screens

- Suitable for tubes diameter 37 mm or more (internal diameter)

Main characteristics

- > Quiet operation below 50 dB(A)*
- > RTS embedded with Modulis and Solar protection functions compatibility
- > Integrated antenna
- > Remote limit settings
- > Black and thin round head for discreet blending
- > Standard round head compatible with LS40 standard accessories
- > Specific accessories specially designed for better acoustic quality
- > Same integration process as LS/Altus 40

*Acoustic pressure at 1 meter of the end-product at nominal torque


Certifications



somfy®

CHARACTERISTICS

Supply voltage	100–240 V AC / 50/60 Hz
Degree of protection	IP 44
Operating temperature	0 °C to 60 °C
Protection class	Class II
Limit switch unit	Progressive
Conformity	www.somfy.com/ce

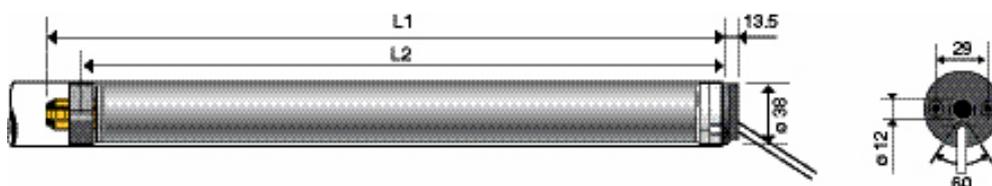

Performance

Nominal voltage	220 V / 60 Hz		
Torque	3 Nm	6 Nm	9 Nm
Speed	36 rpm	24 rpm	14 rpm
Radio frequency available for RTS	447,7 MHz		

Dimensions

L1 (in mm)	504	535	535
L2 (in mm)	480	511	511

Type of cable

220 V / 60 Hz
2 threads by wire

